



## Product data sheet

# 2X-F2-PRT-09

## Central de incendio analógica Aritech con impresora - 2 lazos. (Español).

### Overview

The 2X Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive dark inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial. With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

### The Panel

The fire panels supplied in local language, with user interface, with 2 loops that supports up to 256 devices in 512 zones, have standard 4 supervised sounder/fire-routing outputs, which can be used as freely programmable outputs as well. In addition 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available. The build-in printer allows for printing live panel events or reports.

### Options

The panel supports an extra 2 loop board that brings the panel to up to 512 zones with 4 additional programmable outputs. Add a network board to create a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire repeater panels up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 20 or a 40 zone fire/fault LED indicator board can be mounted in the panel or repeater with ample space for custom text.

### Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4 / EN54-21
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



### Details

- Build-in thermal printer with paper replacement from the front
- 2 loops expandable to 4 with up to 512 zones and 300 outputgroups
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration, setup wizards and default regional setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxilliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 72 hours standby time and 30 minutes alarm
- Compatible with the new loop powered sounders/beacons and base sounders and the 2000 series detectors with replaceable optical chamber

# 2X-F2-PRT-09

## Central de incendio analógica Aritech con impresora - 2 lazos. (Español).

### Technical specifications

#### General

Capacidad máxima del sistema (número de dispositivos)	hasta 32768
Tamaño de la red (nodos)	hasta 64

#### Eléctrico

Tipo de fuente de alimentación	VAC
Voltaje de funcionamiento	110/230 VAC (+10%/-15%) 50 / 60 Hz (±5%)
Consumo de corriente	Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A 2 / 4 A (fuse rating)

#### Bucle

Capacidad máxima del lazo	2
Tipo e índice	Recommended 2 core 1.5 mm <sup>2</sup> twisted pair (cable)
Ratio del cable	56ohm / 1µF max. 2 km (length)

#### Zona

Máxima capacidad de zona	hasta 512
--------------------------	-----------

#### Entrada

Ratio y tipo de entrada	150 mA (max. load); Recommended 2 core 1.5 mm <sup>2</sup> twisted pair (cable)
Programable	2
Terminación	15 kohm (EOL resistor)

#### Salida

Ratio y tipo de salida	Recommended 2 core 1.5 mm <sup>2</sup> twisted pair (cable)
Señalización de alarma de incendios	2 x General Fire + Fault relay
Potencia auxiliar	1 resetable, 500mA / 19.5-28VDC (24VDC nominal)
Programable	4, 750mA / 19.5-28VDC (24VDC nominal) (supervised)
Terminación	15 kohm (EOL resistor)

#### Batería en reposo

Capacidad	Max. 2 x 12V/18Ah (use supplied cables)
-----------	---

#### Físico

Form factor	Grande
Dimensiones físicas	450 x 550 x 171 mm (W x H x D)
Peso neto	7.4 kg (without battery)
Peso de envío	10.1 kg
Color	Gris (RAL 7035)
Tipo de Montaje	Montaje en Superficie
Entradas de cable	18 (20mm) / 2 (20mm) / 2 removable plates (Top / Bottom / Back)

#### Medioambiental

Temperatura de funcionamiento	-8 to +42°C
Temperatura de almacenamiento	-10 to +50°C
Humedad relativa	95% max. noncondensing
Entorno	Interior
Clasificación IP	IP30: for indoor use only

#### Estándares y regulaciones

Cumplimiento	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, VdS, WEEE
Certificación	EN54-13, EN54-2, EN54-21, EN54-4

#### Electrical


Mains supply cable type	3 x 1.5 mm <sup>2</sup> (live, neutral, earth)
-------------------------	--

#### Output

General Fire + Fault supervised	2, 350mA / 19.5-28VDC (24 VDC nominal)
---------------------------------	--

#### Loop

Outputs	2, 250 mA / 29VDC (29VDC to 36VDC )
---------	-------------------------------------

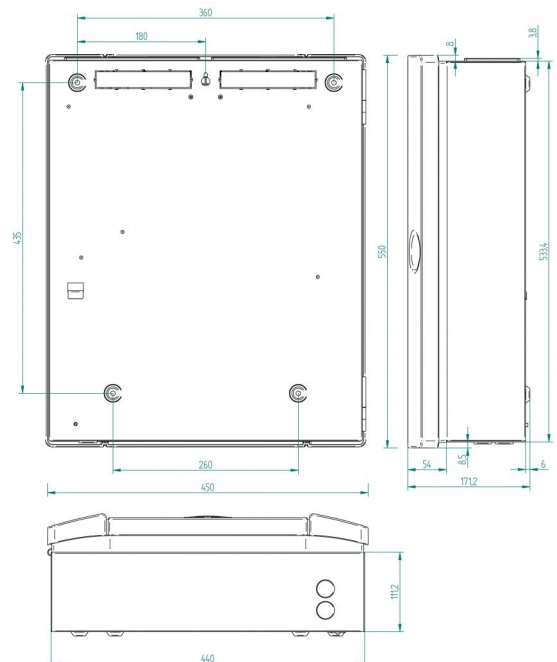

Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de [es.firesecurityproducts.com](http://es.firesecurityproducts.com) o póngase en contacto con su comercial.