

SC-41-0200-0001-99


SmartCell Dual Input/Output Device for Fire Zones

Overview

The SmartCell Input / Output Device is quick and easy to install and offers individual addressing at the SmartCell Control Panel.

Features include two resistor monitored inputs, two voltage free outputs and bidirectional 868 MHz communication.

This device is third party certified and compatible with the full SmartCell product range.

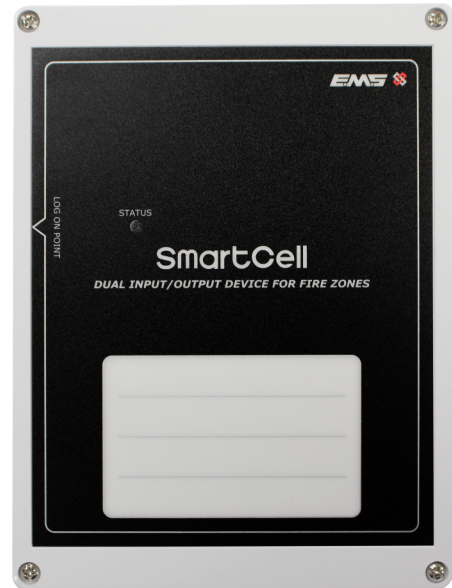

Details

- Full wireless communication with panel
- Quick and easy to install
- Two resistor monitored inputs
- Two voltage free outputs
- For connection to remote fire devices

SC-41-0200-0001-99

SmartCell Dual Input/Output Device for Fire Zones

Technical specifications

General

Wireless frequency	868 MHz
--------------------	---------

Input

Input quantity	2
----------------	---

Input type and rating	Resistor monitored inputs
-----------------------	---------------------------

Output

Output quantity	2
-----------------	---

Output type and rating	Voltage free outputs, rated 1 A at 30 VDC
------------------------	-------------------------------------------

Physical

Physical dimensions	150 x 200 x 55 mm (W x H x D)
---------------------	-------------------------------

Net weight	0.45 kg
------------	---------

Mounting type	Wall mount
---------------	------------

Batteries	3 x ER14505M 3.6 V lithium thionyl chloride batteries (Fanso or Titus)
-----------	------------------------------------------------------------------------

Environmental

Operating temperature	-10 to +55°C
-----------------------	--------------

Storage temperature	-10 to +30°C (with batteries) -10 to +55°C (without batteries)
---------------------	-------------------------------------------------------------------

Relative humidity	95% noncondensing max.
-------------------	------------------------

Environment	Indoor
-------------	--------

Regulatory

Compliance	CE
------------	----

Certification	CPR
---------------	-----

Standards	EN54-13 EN54-18 EN54-25
-----------	-------------------------------



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 5 May 2023 - 10:31