

## DS-UC4 2K Web Camera



- High quality imaging with 2560 × 1440 resolution
- Low distortion lens for reducing image distortion
- Built-in dual-microphone with clear sound
- USB Type-C interface, supporting USB 2.0 protocols
- Plug-and-play, no need to install driver software
- Support auto focus

## ▪ Specification

Camera	
Image Sensor	4 MP CMOS
Signal System	PAL/NTSC
Frame Rate	MJPG : 2560 × 1440 @ 30 fps/25 fps 1920 × 1080 @ 60 fps/50 fps/30 fps/25 fps 1280 × 960 @ 60 fps/50 fps/30 fps/25 fps 1280 × 720 @ 60 fps/50 fps/30 fps/25 fps 640 × 480 @ 60 fps/50 fps/30 fps/25 fps 640 × 360 @ 30 fps/25 fps  YUV2 : 1920 × 1080 @ 5 fps 1280 × 960 @ 5 fps 1280 × 720 @ 10 fps 640 × 480 @ 30 fps 640 × 360 @ 30 fps
Resolution	2560 (H) × 1440 (V)
Min. Illumination	0.1 Lux @ (F1.2, AGC ON)
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Lens	3.6 mm fixed focal lens
Field of View	horizontal FOV: 80°, vertical FOV: 50°, diagonal FOV: 88°
Lens Mount	M8
Day & Night	24/7 Color Imaging
Angle Adjustment	pan: 0° to 360°; tilt: 0° to 90°; rotation: 0°
Digital Zoom	1.5 ×
Cable Length	2 m
Lens	
Depth of Field	5 cm to ∞
Image	
Wide Dynamic Range (WDR)	Digital WDR
White Balance	Auto
Audio	
Audio Sampling Rate	16 kHz
Interface	
Video Output	USB 2.0
Operating System	Recommended systems Windows 7/8/10/11 (resolution higher than 1080P is only available in Windows 8.1 and above version) Android 8.1 and above version Linux 4.14 and above version macOS 10.12 and above version Chrome OS
Built-in Microphone	2 built-in microphones, picking up sounds in the radius up to 5 meters





Indicator	White: Normally Working
<b>General</b>	
Operating Conditions	-10°C to 40°C (-40°F to 104°F), Humidity: 90% or less (non-condensing)
Power Supply	DC 5V ± 5% (USB)
Consumption	2.5 W MAX
Material	Metal
Dimension	120 mm × 27.9 mm × 25.6 mm (4.72" × 1.10" × 1.01")
Weight	Approx. 147 g (0.32 lb.)
<b>Accessory</b>	
Packing List	Camera × 1 USB Cable × 1 Quick Start Guide × 1

▪ **Available Model**

DS-UC4

DS-UC4(JAPAN)

▪ **Dimension**

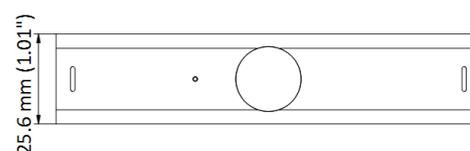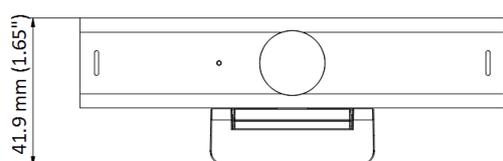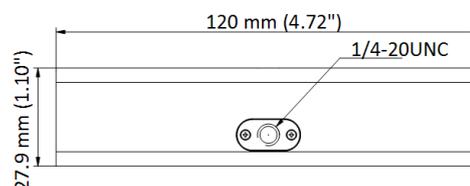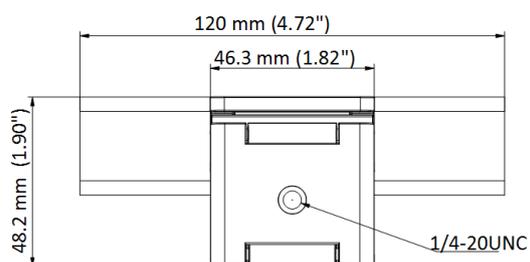



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

