

DS-K7CRT01
Stand Pole with Card Receiver

- It can be used in a variety of scenarios, such as ticketing, visitor, membership management scenarios, to achieve card recycling.
- It can distinguish between employee cards and visitor cards, and only collect visitor cards.
- It can realize illegal card, invalid card spit card function.

▪ Specification

Interface	
RS-485	1
RS-232	1
General	
Pedestal material	SUS304 stainless steel
Built-in access controller	No
Indicator	Support
Power supply	DC 12 V 2 A
Power consumption	21 W
Working temperature	-10°C ~ 50°C (14°F ~ 122°F)
Working humidity	0% to 95% (No Condensing)
Dimensions	Without Packaging: 900mm x ϕ 137mm (35.4' x ϕ 5.4') With Packaging: 1105mm x 215mm x 225mm (43.5' x 8.5' x 8.9')
Weight	(Net) Left: 4.9 kg (10.8 lb); (Rough) Left: 6.3 kg (13.9 lb);
Application environment	Indoor

▪ Maintenance

The main element of the turnstile is stainless steel, which is rustless (antioxidant) and corrosion resistant (The anti corrosion ability in the medium of acid, alkali, and salt). In order to keep the stainless steel from being oxidized or corroded, you should clean and care the turnstile surface periodically .


The instructions and tips for maintaining the turnstile are as follows:

- Select different stainless steel types according to the variety of the environments. You can select 304 stainless steel for common circumstances and 316 stainless steel for the scenarios of seashores and chemical plants.
- Keep the device surface clean and dry.
- Use non-woven cloth and ethyl alcohol to clean the dirt on the device surface.
- Use sourcing pad (do not use mesh cleaning ball) to clean the rust on the device surface by following the wire drawing on the stainless steel. And then use non-woven cloth and stainless steel cleaner to wipe the device surface.
- Clean and maintain the device by using non-woven cloth and stainless steel cleaner periodically. It is suggest to clean the device every month in common circumstances and every week for severe environments (seaside and chemical plants for instance).

▪ Available Model

DS-K7CRT01/E,DS-K7CRT01/D

▪ Dimension

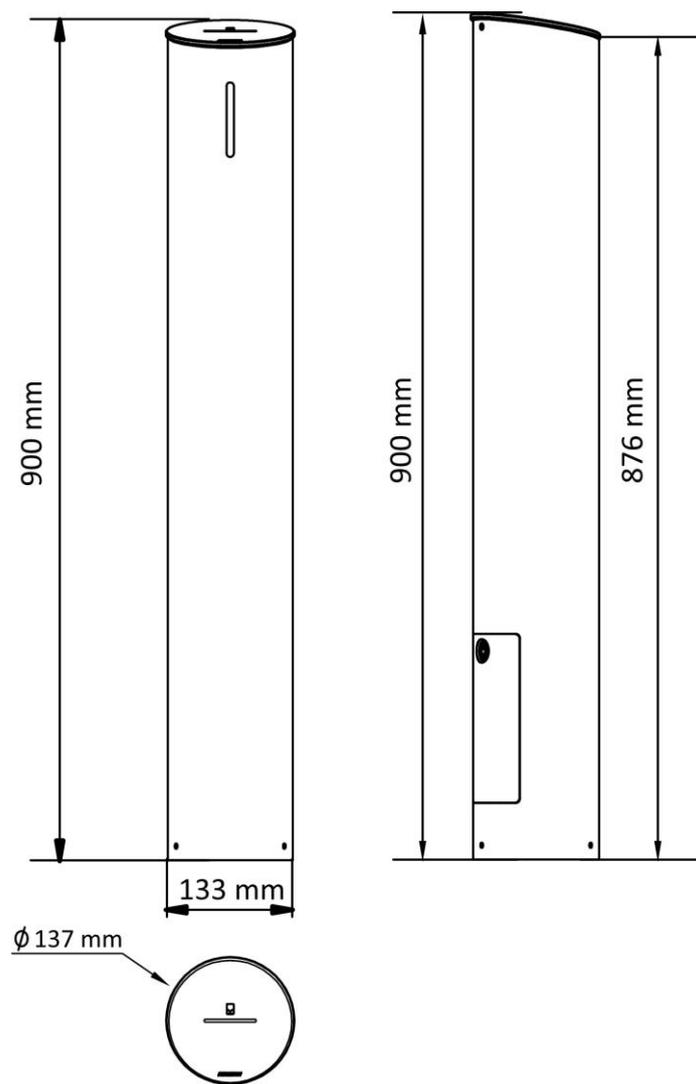

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

