


EST-xCtrLine-2

2 loudspeaker line control card

Overview

EST-xCTRLN-2 provides 2 independent speaker line outputs (A, B). Card allows to switch between main and spare amplifiers. Line measurement methods can be made by: Impedance, Loop or End of Line Module (EOL).

The measurement method is selected from the software configuration. EST-xCTRLN-2 provides fault detection, opening and ground leakage.

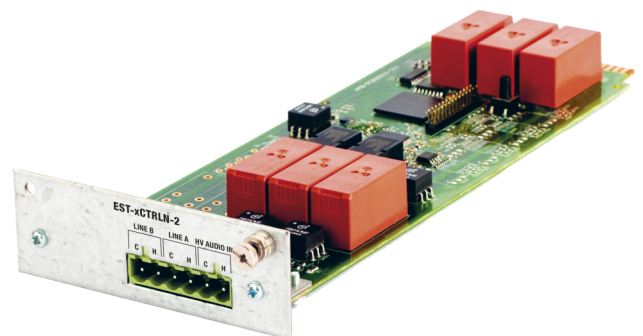

EST-xCtrLine-2

2 loudspeaker line control card

Technical specifications

Eléctrico

Consumo de corriente	121 mA max. for 48 V
----------------------	----------------------

Físico

Dimensiones físicas	70 x 215 x 30 mm (W x H x D)
---------------------	------------------------------

Medioambiental

Temperatura de funcionamiento	0 to +60°C
Temperatura de almacenamiento	-20 to +70°C
Humedad relativa	15 to 80% noncondensing (operation) 5 to 95% noncondensing (storage)

Regulatory

Normativas	EN54-16
------------	---------

Electrical

Power supply	Internal from the Control Unit backplane
Type of connector	6 pin screw terminal type PHOENIX, 5.08 mm
Impedance measurement frequency	1 kHz to 48 kHz
Frequency of the signal for EOL modules	18 kHz to 24 kHz
Maximum measured current	20 A
Maximum measured voltage	200 V
Accuracy of measurement	up to 5%

Physical

Accessories	Screw terminals 6 pins, the distance between the partitions 5.08 mm
-------------	---



Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 7 December 2021 - 16:05