


TVT

Secure The World With You

www.tvt.net.cn

32 / 64 CH NVR
HDMI Display

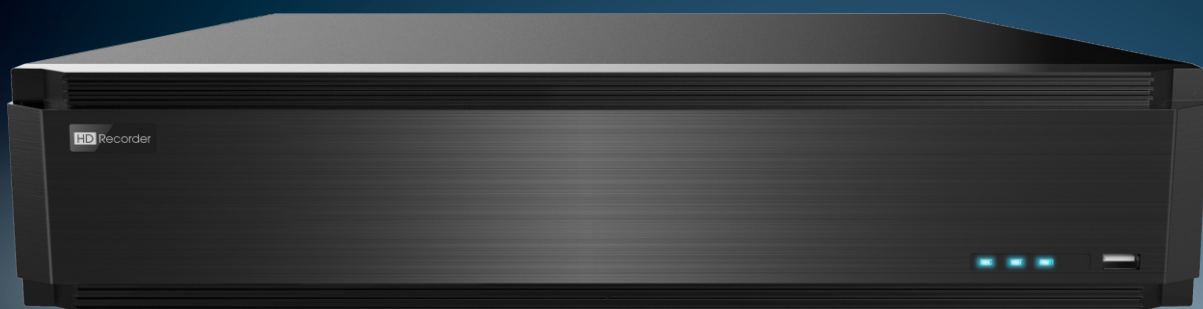

TD-3500H8

8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P HD NVR

TVT

TVT DIGITAL TECHNOLOGY CO., LTD.


Address: 5F, North Block, CE Lighting House, Hi-Tech Park, Nanshan District, Shenzhen City, Guangdong Province, P.R.China 518057

Tel: +86-755-3330 6001

Fax: +86-755-3330 6002

Web site: www.tvt.net.cn

E-mail: overseas@tvt.net.cn






Introduction

TD-3500H8 series are 32 / 64 CH 8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P high definition NVRs, which adopt the most advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system. TD-3500H8 support 32 / 64 CH IP input, simultaneous 16 CH playback, and 4K high definition display. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.

Characteristics

- Support 32 / 64 CH 8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P IP input
- Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor
- Playback : 16 CH simultaneous playback
- Search : time slice, time, event (manual, sensor, motion), tag search
- Express and flexible backup via USB, network and so on
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol and CMS supported
- Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phone and PAD
- Powerful smart phone & Pad surveillance with iOS and Andriod OS

Dimensions

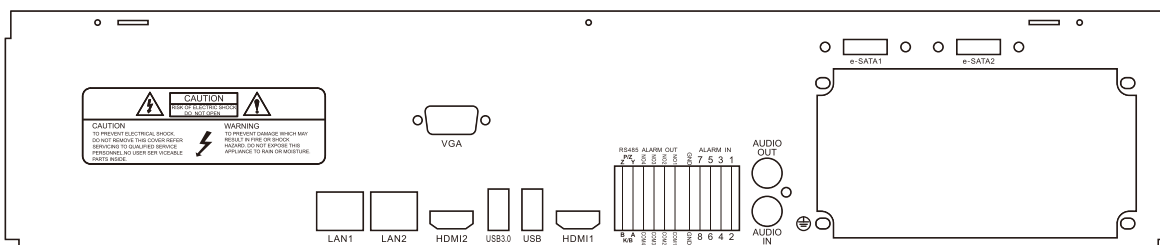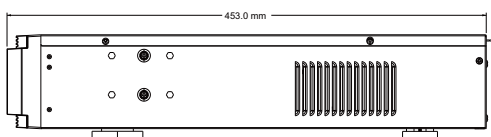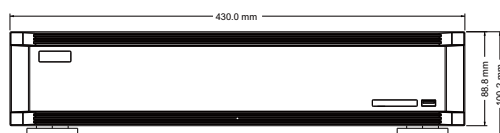

Specification

Model		TD-3532H8	TD-3564H8
System	Compression	Standard H.265	
	OS	Embedded Linux	
Video	Network Input	32 CH IPC input	64 CH IPC input
	Network Access Bandwidth	256Mbps	320Mbps
	Network Access Format	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P@25 / 30fps	
	Output	HDMI × 2 : one of 4K × 2K / 1920 × 1080 / 1280 × 1024 the other of 1920 × 1080 / 1280 × 1024 VGA × 1 : 1920 × 1080 / 1280 × 1024	
Audio	Network Input	32 CH IPC audio input	64 CH IPC audio input
	2-way Audio	RCA × 1	
	Local Output	RCA × 1	
Record	Record Stream	Dual stream recording	
	Resolution	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P	
	Mode	Manual, timer, motion, sensor	
Playback	Simultaneous Playback	Max 16 CH	
	Search	Time slice / time / event / tag search	
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events	
	Function	Play, pause, FF, FB, digital zoom, etc.	
Alarm	Mode	Manual, sensor, motion, exception	
	Input	8 CH local alarm input, support IPC alarm input	
	Output	4 CH	
	Triggering	Record, snap, preset, e-mail, etc.	
Network	Interface	RJ45 10 / 100 / 1000 Mbps × 2	
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP	
	Web Client	Max 10 users online	
Mobile Device	OS	iOS, Andriod	
Storage	HDD	SATA × 8, e-SATA × 2, max 6T per HDD	
Backup	Local Backup	U disk, USB mobile HDD	
	Network Backup	Yes	
Port	USB	USB 2.0 × 2 (one in the front panel and the other in the rear panel), USB 3.0 × 1 (rear panel)	
	Remote Controller	Yes	
Others	Power Supply	ATX	
	Consumption	≤ 15W (without HDD)	≤ 15W (without HDD)
	Dimensions (mm)	430 × 453 × 89 (W × D × H)	
	Work Environment	-10 ~ 50 °C , 10% ~ 90% humidity	