

TVT

Secure The World With You

www.tvt.net.cn



TD-9422S1

**2 MP Network IR Water-proof
Bullet Camera**

TVT

TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 5F, North Block, CE Lighting House, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China 518057


Tel: +86-755-3330 6001

Fax: +86-755-3330 6002

Web site: www.tvt.net.cn

E-mail: overseas@tvt.net.cn


2 MP Network IR Water-proof Bullet Camera

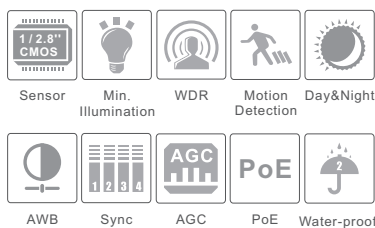

Features

- 2MP (1920 x 1080) full real time coding
- Max resolution:1920 x 1080
- ICR auto switch, true day / night
- 20 ~ 30m IR night view distance
- 3D DNR, digital WDR
- ROI coding
- PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 ingress protection
- Support three streams

Dimensions

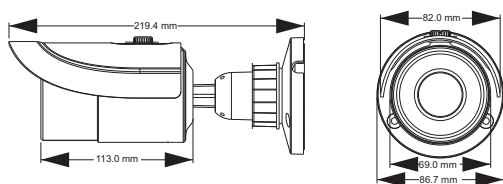

Available Accessories



TD-YXH0201

Specifications

Model	TD-9422S1
Specifications	
Camera	
Image Sensor	1 / 2.8 "CMOS
Image Size	1920 x 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Auto Iris	Fixed Iris
Min. Illumination	0.1 lux @F1.2, AGC ON; 0 lux with IR
Lens	3.6 mm @ F1.6, angle of view : 79° (2.8 mm, 6 mm optional) 2.8 ~ 12 mm @ F1.4, angle of view : 96° ~ 35°
Lens Mount	M12 and Φ14 optional
Day & Night	ICR
Wide Dynamic Range	Digital WDR
Digital NR	3D DNR
Angle Adjustment	Any angle
Image	
Video Compression	H.264 / MJPEG
H.264 Compression Standard	Baseline Profile / Main Profile / High Profile
Resolution	1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240
Main Stream	60Hz : 1080P (1 ~ 30fps) / 720P (1 ~ 30fps) 50Hz : 1080P (1 ~ 25fps) / 720P (1 ~ 25fps)
Bit Rate	256Kbps ~ 5Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI	3 ROI
Interfaces	
Network	RJ45
Functions	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 3 users ; Support multi-stream real time transmission
Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, DDNS, SMTP, FTP
Interface Protocol	ONVIF
Storage	Network remote storage
Smart Alarm	Motion alarm
PoE	Yes
IR Distance	20 ~ 30 m
Water-proof	IP66
Others	
Power Supply	DC 12V / PoE
Power Consumption	< 2W
IR Consumption ON	< 5W
Operating Environment	- 20°C ~ 50°C, 10% ~ 90% humidity
Dimensions (mm)	Φ87 × 219
Weight (net)	605g
Installation	Wall mounting, pendent mounting

Available Model

Available Model	TD-9422S1 (D / PE / IR2)
	TD-9422S1 (D / FZ / PE / IR2)