

## DH-NVR4104HS-W-S2

### 4CH Compact 1U WiFi Network Video Recorder



### Features

- > Up to 4 channel IP camera input
- > H.264/MJPEG dual codec decoding
- > Max 80Mbps incoming bandwidth
- > HDMI/VGA simultaneous video output
- > All channel synchronous realtime playback, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Vivotek and etc.
- > ONVIF Version 2.4 conformance
- > 3D intelligent positioning with Dahua PTZ camera
- > Support 1 SATA HDD up to 4TB, 2 USB2.0
- > Support three-antenna to strengthen the WiFi signal
- > Support 2.4GHz and 5GHz dual-bands
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS) &Smart Phone(DMSS)

# DH-NVR4104HS-W-S2


## Technical Specifications

<b>Model</b>	<b>DH-NVR4104HS-W-S2</b>
<b>System</b>	
Main Processor	Dual-core embedded processor
Operating System	Embedded LINUX
<b>Video&amp; Audio</b>	
IP Camera Input	4 channel
Two-way Talk	N/A
<b>Display</b>	
Interface	1 HDMI, 1 VGA
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768
Display Split	1/4
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
<b>Recording</b>	
Compression	H.264/MJPEG
Resolution	5Mp(2560×1920)/3Mp(2048×1536)/1080P(1920×1080)/720P(1280×720)/D1 (704×576/704×480)
Record Rate	80Mbps
Bit Rate	48~ 8192kbps
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
<b>Video Detection</b>	
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank
<b>Playback &amp; Backup</b>	
Sync Playback	1/4
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device/Network/Internal SATA burner
<b>Network</b>	
Ethernet	1 RJ-45 port (10/100Mbps)
Wireless Network	Built-in WiFi module
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android
<b>Storage</b>	
Internal HDD	1 SATA port, up to 4TB
<b>Auxiliary Interface</b>	
USB	2 ports (1 Front, 1 Rear), USB2.0

## DH-NVR4104HS-W-S2

General	
Power Supply	DC12V/2A
Power Consumption	10W(without HDD)
Working Environment	-10°C~+55°C / 10%~90%RH / 86~106kpa
Dimension (W×D×H)	Compact 1U, 260mm×246.4mm×47.6mm
Weight	0.5KG(without HDD)

### System Connection

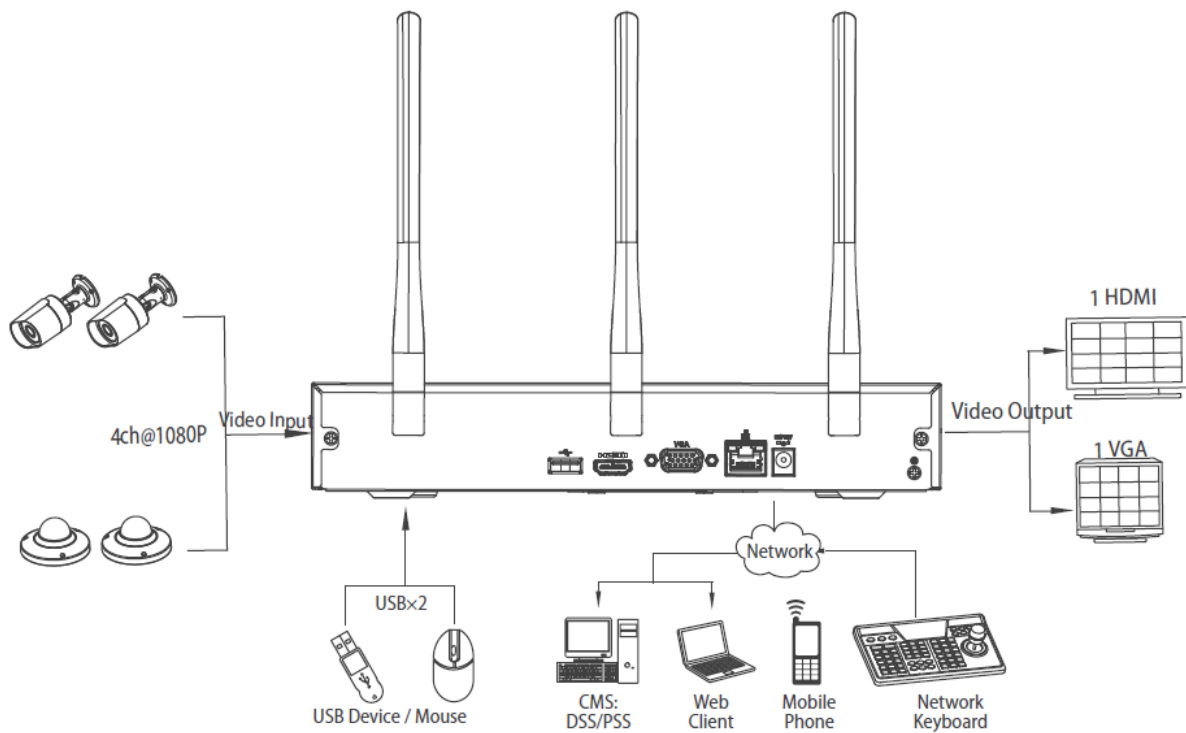

\*Takes NVR4104HS-W-S2 as an example

### **Dahua Technology Co., Ltd.**

1199'BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

\*Design and specifications are subject to change without notice.

© 2016 Dahua Technology Co., Ltd.