


CAMERA

TD-9322A3-LR

2MP HD ANPR Box Network Camera



- Starlight
- 1080P (1920 × 1080)@30fps
- Support SMART H.265/H.264 coding
- ICR auto switch, true day/night
- 3D DNR, true WDR, HLC, BLC and ROI coding
- Built-in micro SD card slot, up to 128GB
- 1CH built-in MIC; 1CH audio input; 1CH audio output
- 2CH alarm input; 2CH alarm output
- USB × 1; RS 485 × 1; ABF; Reset
- DC12V/AC24V/PoE power supply
- P2P function optional
- Support three streams
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent Analytics: video abnormality (video tampering, scene change), license plate recognition

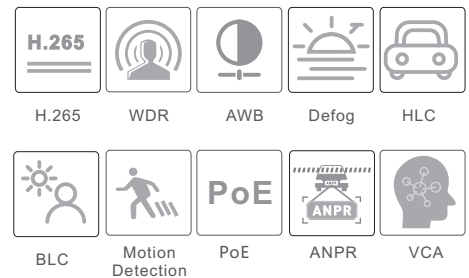

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn


SPECIFICATIONS

Model Specifications Camera	TD-9322A3-LR
Image Sensor	1 / 2.8 "CMOS
Image Size	1920 × 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	DC-IRIS
Min. Illumination	0.0026 lux@F1.2, AGC ON
Lens Mount	CS
ABF	Yes
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
Image	
Video Compression	Smart H.265 / H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream	60Hz:1080P/720P(1~30fps); 50Hz:1080P/720P (1~25fps) HFR Mode: 1080P/720P(1~60fps/50fps)
Sub Stream	60Hz : 720P/D1/CIF (1~30fps); 50Hz: 720P/D1/CIF (1~25fps)
Third Stream	60Hz : D1/CIF/480x240 (1~30fps); 50Hz: D1/CIF/480x240 (1~25fps)
Bit Rate	64 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
Audio Compression	G711A/U
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ45
Video Output	No
Audio	1CH audio input; 1CH audio output
Storage	Built-in micro SD card slot, up to 128GB
Hardware Reset	Yes
Alarm	2CH alarm input; 2CH alarm output
USB	USB port × 1
RS 485	Yes
Functions	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, UPnP, HTTP, HTTPS, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection; Sensor alarm; SD card full; SD card error; IP address conflict; Network disconnection
Intelligent Analytics	Scene change detection, video tampering detection, license plate recognition
General Function	Watermark, IP address filtering, video mask, heartbeat, password protection, non-photosensitive switch, image distortion correction
PoE	Yes (IEEE802.3af)
LPR	
Snapshot	Overview and cutout of plate for picture
White List	10000
Capture Speed Range	0~70km/h

Others

Power Supply	DC12V/AC24V/PoE
Power Consumption	< 4W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	153 × 79 × 64
Weight (net)	Approx. 0.63KG
Installation	Wall mounting

DIMENSIONS

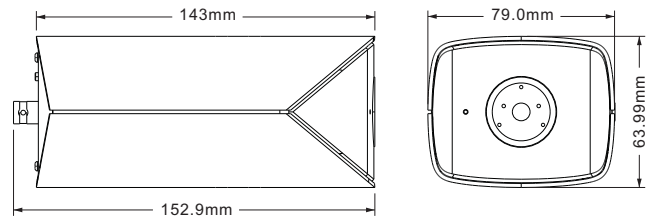

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9322A3-LR
-----------------	--------------