


PRODUCT

CTB003

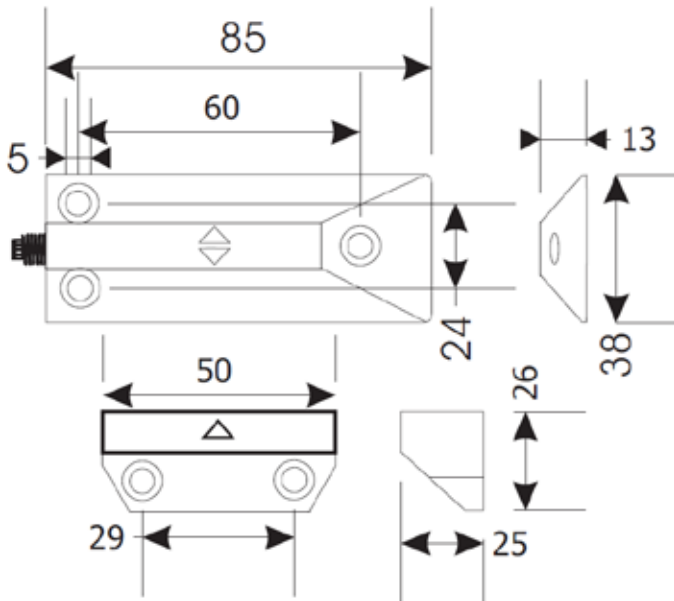

Magnetic contact with
for surface mounting on
ferromagnetic roller shutters and garage
doors. Suitable for floor installation. Contact
housing 15mm for easy fitting.
With armoured cable.
Where is possible Y=5mm mounting gap is
recommended.

Technical

Material/Colour: Polycarbonate
Dimension REED: 85x38x13mm
Dimension MAGNET: 50x26x25mm
Tmin/Tmax: -25/+60°C
Wiring: 4 white wire 120 cm long
Approvals: EN50131-2-6 Grade 2 Class IV
Certificate IMQ: CA12.01264

Electrical

passive component, maximum value)

Minimum Gap

25mm(non ferromagnetic) 18(ferromagnetic)

Pmax: 10VA
Vmax: 60Vdc; 42,2Vac_{peak}
Imax: 0.50 A
R initial max: R=0.1ohm
R insulation: R=10¹²ohm
MTBF operations: 10⁸

