

DVR

4/8CH Hybrid DVR



TD-2100NS-HP



TD-2100NS-HP series supports 4 / 8 CH 8MP/5MP/4MP/3MP/1080P/720P/WD1 analog and IP video input simultaneously. It adopts the standard H.265 high profile compression format and the most advanced SOC technique to ensure real time recording in each channel and realize outstanding robustness of the system.

TD-2100NS-HP series supports 4 / 8 CH video input, 1 CH audio input, simultaneous 4 / 8 CH playback. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.



en.tvt.net.cn



For more information, please visit our website

Features



- 4 / 8 CH TVI / AHD / CVI 8MP / 5MP / 4MP / 3MP / 1080P / 720P / WD1 video input
- Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphics User Interface (GUI), window style operation by mouse
- Multi-mode recording: manual / timer / motion / smart event
- Playback : 4 / 8 CH simultaneously playback
- Search: time slice, time, event, tag and smart search
- Express and flexible backup via USB, network and so on
- Pentaplex: preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log review and device status review
- HDMI 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Android OS

Dimensions

TD-2104NS-HP

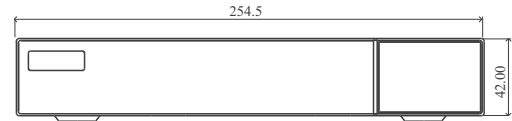


TD-2108NS-HP

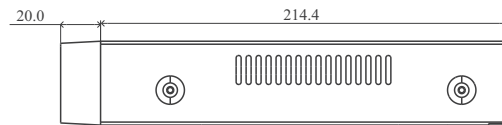


Rear Panel

TD-2104NS-HP

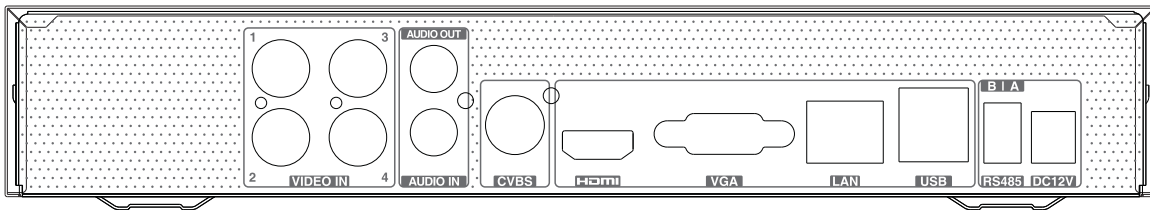

TD-2108NS-HP

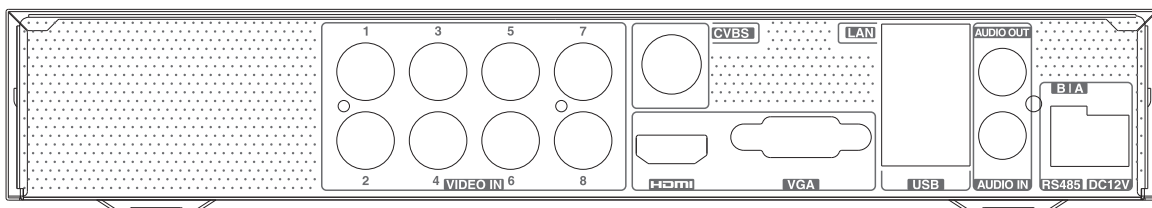

Specifications

Model		TD-2104NS-HP	TD-2108NS-HP
System	OS	Embedded Linux	
Video	Analog Video Input	BNC × 4	BNC × 8
		BNC interface (1.0Vp-p; 75Ω)	
		TVI/AHD/CVI : 4K@15fps, 5MP@20fps, 4MP/3MP/1080P/720P/WD1@30fps (live)	
	IP Video Input	2CH	8CH
		Up to 8MP@20fps, lower than 8MP @30fps	
	Total Input	6CH	16CH
	Output	HDMI × 1 : 3840 × 2160 / 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 BNC × 1 : CVBS (used as the main or spot output)	
	Compression	H.264/H.265	
Multi-screen Display	1 /4/6/8/9	1 /4/6/8/9/13/16	
Audio	Input	RCA × 1	
	Output	RCA × 1 (linear, 600Ω)	
	Two-way audio	Take up channel one audio input	
	Compression	G.711(U/A)	
Record	Resolution	4K/4K Lite/5MP/5MP Lite/4MP/4MP Lite / 3MP/1080P/720P/WD1/D1	
	Frame Rate	Analog Channel: 4K@6fps/7fps (PAL/NTSC) (4 CH DVR: only CH 1 supports; 8CH DVR: all channels support) 4K Lite@12fps/15fps (PAL/NTSC) 5MP@12fps (PAL / NTSC) 5MP Lite@20fps (PAL / NTSC) 4MP/3MP@12fps / 15fps (PAL / NTSC) 4MP Lite/1080P/720P/WD1/D1@25fps/30fps (PAL / NTSC) IP Channel: 8MP @20fps (PAL / NTSC); lower than 8MP @25fps / 30fps (PAL / NTSC)	
	Bit Rate	32Kbps ~ 4Mbps	32Kbps ~ 5Mbps
	Mode	Manual, timed, motion, smart event	
	Playback	4CH	8CH
Playback	Search	Time slice / time / event / tag search	
	Smart Search	Highlight colors to display the camera record in a certain period of time, different colors refer to different record events	
	Function	Play, pause, FF, FB, digital zoom, etc.	
	Mode	Manual, motion, exception, smart event	
Alarm	Input	No	
	Output	No	
	Interface	RJ 45 100Mbps × 1	
Network	Protocol	TCP/IP, PPPoE, DHCP, DNS, DDNS, UPnP, HTTP, HTTPS, NTP, SMTP, ONVIF	
	Incoming Bandwidth	16Mbps	32Mbps
	Outgoing Bandwidth	40Mbps	80Mbps
	Client Connection	Max. 10 users access	
	MobileDevice	OS	iOS, Andriod
Storage	HDD	SATA × 1, up to 10TB per HDD	SATA × 1, up to 10TB per HDD
Backup	Local Backup	U disk, USB mobile HDD	
	Network Backup	Yes	
Port	RS 485	Yes (half-duplex), connect to PTZ or keyboard	
	USB	USB 2.0 × 2	
	Remote Controller	Optional	
Others	Power Supply	DC12V / 1.5A	DC12V /3A
	Consumption	≤ 10W (without HDD)	≤ 15W (without HDD)
	Dimensions(mm)	255 × 222 × 42 (W × D × H)	255 × 234 × 42 (W × D × H)
	Working Environment	-10~50°C, 10%~90% (humidity)	
	Certificate	CE, FCC	
	Environmental Protection	Comply with Directive EU RoHS, WEEE, REACH	