

DC124

Contacto magnético para empotrar en puertas. Apertura operativa máx. 9mm. 2m de cable.

The DC107/124/125/887/888 contacts are designed specifically for use in steel doors commonly found in commercial building applications. Many models including, wide gap, CO and biased for high security applications make the series the most widely used and comprehensive line available.

Easy Installation

The unique housing design features a rugged unibody construction with flexible ribbed sides for quick, secure installation without gluing. The magnet housing isolates the magnet from the surrounding steel for maximum gap distances, both make and break.



Details

- Special design for steel mounting
- Self-lock mounting
- Comprehensive product range
- Standard 2 m wire length
- Tamper loop provided
- Built-in resistors available to special order

DC124

Contacto magnético para empotrar en puertas. Apertura operativa máx. 9mm. 2m de cable.

Technical specifications

General

Tipo de Aplicación	Montaje empotrado
Tipo de contacto	CO
Conectividad	5 wires, 2 m

Wired/wireless


Wired-wireless	Cableado
----------------	----------

Physical

Color	Blanco
Diámetro de la perforación	19.1 mm
Dimensiones del imán	24.1 x 39.7 mm (Ø x L)
Dimensiones del contacto / sensor	24.1 x 29.5 mm (Ø x L)
Brecha de funcionamiento	9 mm (max.)

Standards & regulation

Grado EN50131	Grado 2
---------------	---------

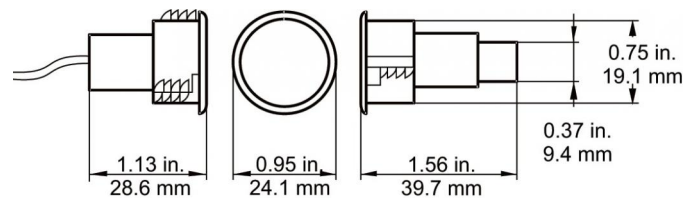

Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 23 July 2021 - 9:53