

# DC116

## SURFACE MOUNT CONTACT

### Industrial Surface Mount Contact


---

The DC116 series features a wider make distance and works better on steel without time-consuming installation of brackets. A wider break distance helps prevent false alarms caused by loose fitting doors.

### Applications

---

The contacts are used to protect openings such as metal entry/exit doors, overhead doors, roof hatches or hinged skylights.

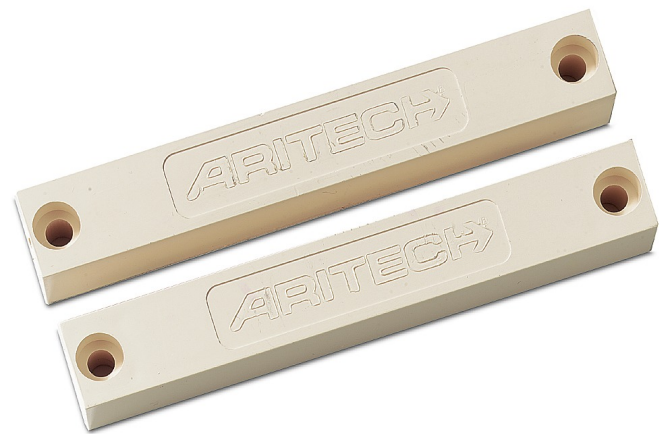

### Details

---

- Rugged design for industrial applications
- Models for use on steel without time-consuming brackets
- Concealed terminals resist tampering and inadvertent shorting
- Easy clamping terminals speed installation
- Mounting screws included

# DC116

## SURFACE MOUNT CONTACT

### Technical specifications

---

#### General

Application type	Surface Mount
Contact type	NC
Connectivity	Screw

#### Wired/wireless

Wired-wireless	Wired
----------------	-------

#### Physical

Physical dimensions	99 x 17 x 15 mm
Colour	Beige
Operating gap	31 mm

