

CAMERA

TD-9443E3

4MP IR Water-Proof Bullet Network Camera



- Smart H.265/H.265+/H.265/Smart H.264/H.264+/H.264/MJPEG coding
- Max. resolution: 2592 × 1520
- ICR auto switch, true day / night vision
- Up to 100m IR night view distance; motorized zoom lens
- 3D DNR, true WDR, HLC, BLC, Defog, NIR, Smart IR and ROI coding
- Support image distortion correction
- Built-in micro SD card slot; up to 256GB
- DC12V/PoE power supply
- IP 67 ingress protection
- Support three streams
- Support remote monitoring by smart phones & tablet PCs with iOS and Android OS
- Intelligent analytics



H.265 Day&Night WDR AWB Defog HLC



BLC Motion Detection PoE IP67 VCA -30°~60°



en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: overseas@tvt.net.cn

SPECIFICATIONS

Specifications	Model	TD-9443E3		
Camera				
Image Sensor	1/3" CMOS			
Image Size	2592 × 1520			
Electronic Shutter	1/3 s ~ 1 / 10000 s			
Iris Type	DC Iris			
Min. Illumination	0.005 lux@F1.6,AGC ON;0 lux with IR			
Lens	2.8~12mm@F1.4, H.FoV: 93°~31.8°; V.Fov: 53°~19°; D.FoV: 108°~36°		7~22mm@F1.6, H.FoV: 42°~18°; V.Fov: 24.5°~11°; D.FoV: 48°~21°	
	Focus	Motorized		
Lens Mount	Φ14			
Day & Night	ICR			
Wide Dynamic Range	120dB			
BLC	Yes			
HLC	Yes			
Defog	Yes			
Digital NR	3D DNR			
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°			
Image				
Video Compression	Main stream: Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG			
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile			
Resolution	4MP (2592 × 1520), 2K (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240			
Main Stream	4MP/2K/3MP/1080P/720P (60Hz: 1~30fps; 50Hz: 1~25fps) HFR mode: 1080P/720P (60Hz: 1~60fps; 50Hz: 1~50fps)			
Sub Stream	720P/D1/CIF/480×240 (60Hz: 1~30fps; 50Hz: 1~25fps)			
Third Stream	D1/CIF/480×240 (60Hz: 1~30fps; 50Hz: 1~25fps)			
Bit Rate	64 Kbps ~ 8 Mbps			
Bit Rate Type	VBR / CBR			
Audio Compression	G711A / U			
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser			
ROI	Each ROI to be configured separately			
Interfaces				
Network	RJ 45			
Video Output	CVBS output (BNC × 1)			
Audio	1CH audio input; 1CH audio output			
Storage	Built-in micro SD card slot; up to 256GB			
Reset	Yes			
Alarm	1CH alarm input; 1CH alarm output			
Intelligent Analytics (Smart Events)				
Perimeter Protection	Line crossing, region entrance/exiting/intrusion (human/motor vehicle/non-motor vehicle classification)			
Statistics	Target counting by line/area, heat map			
Exception Detection	Scene change, video blur and video cast detection			
Face Detection	Face detection and face capture			
Other Events	Abandoned/missing object detection			
DORI Distance				
Lens	Detect	Observe	Recognize	Identify
2.8~12mm(W)	62.33m(204.49ft)	24.93m(81.79ft)	12.47m(40.91ft)	6.23m(20.43ft)
2.8~12mm(T)	203.41m(667.35ft)	81.36m(266.92ft)	40.68m(133.46ft)	20.34m(66.73ft)
7~22mm(W)	123.77m(406.06ft)	49.51m(162.43ft)	24.75(81.20ft)	12.38m(40.61ft)
7~22mm(T)	204.64m(671.39ft)	96.26m(315.81ft)	40.13m(131.66ft)	24.06m(78.93ft)
Functions				
Remote Monitoring	Web Browser/TVT NVMS2.0/NVR/mobile APP			
Web Browser	IE(plug-in required)/Google Chrome/Edge/Firefox/Safari			

Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission	
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP,HTTP, 802.1x, UPnP, HTTPs, HTTP POST, QoS	
Interface Protocol	ONVIF	
Storage	Network remote storage; micro SD card storage	
Smart Alarm	Motion detection, sensor detection, SD card error, SD card full, IP address conflict, cable disconnection	
General Function	Watermark, IP address filtering, video mask, heartbeat, password protection, image distortion correction, corridor pattern	
PoE	Yes, IEEE802.3af	
IR Distance	50 ~ 70 m	70 ~ 100 m
Ingress Protection	IP67	
Others		
Power Supply	DC12V/PoE	
Power Consumption	< 10W	
Storage Conditions	- 30 °C ~ 65 °C (-22°F~149°F), Humidity: less than 95 % (non-condensing)	
Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)	
Dimensions (mm)	279.5 × 100.3 × 88.9	
Weight (net)	Approx. 1.04KG	
Installation	Ceiling mounting; Wall mounting	
Certificate	CE, FCC	
Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)	

DIMENSIONS

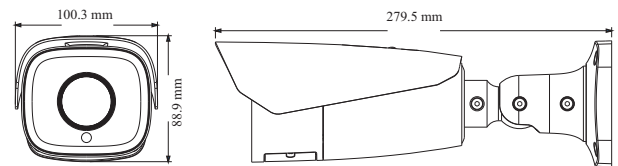

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9443E3(D/AZ/PE/AR5)	Motorized lens (2.8~12mm)
	TD-9443E3(D/AZ/PE/AR7)	Motorized lens (7~22mm)