

# LAS30-57CN-RJ45 Single Port POE Midspan

### **Key Features**

- RoHS compliant
- Compatible With All IEEE pre 802.3af, 802.3at and Legacy Powered Devices
- Input voltage:90Vac~264Vac
- Support 300Vac input for long time work
- Output over current protection
- Short circuit protection
- Surge protection
- CE mark

## Description

Hikvision POE midspan is designed to extract power from a conventional twisted pair Category 5 Ethernet cable, conforming to the IEEE 802.3at Power-over-Ethernet (PoE) standard.

The converter signature and control circuit provides the PoE compatibility signature and power classification required by the Power Sourcing Equipment (PSE) before applying up to 30W power to the port.


| Model                | LAS30-57CN-RJ45   |
|----------------------|---|
| Input Voltage        | AC100V~240V   |
| Output Voltage Range | 56V (-4%~+2%)   |
| Output Power         | 30W Max   |
| Pass Through Data    |   |
| Rates                | 10/100/1000 Mbps  |
| Ports                | Two 10/100/1000M adaptive RJ45 ports, one is DATA/IN, another is PoE/DATA |
| LED Indicator        | Power & PoE Status(The module operates normally when MID and END are on)  |
| Base Function        | Compliance to IEEE 802.3 at/af Standard                                   |
| Protection Methods   | Output Over Current Protection, Short Circuit Protection                  |
|                      | AC port : EN 61000-4-5 criterion B, L-N 2 kV, L,N-PE 4 kV                 |
| EMC standard         | PoE port: 1kV differential mode (criterion B)                             |
|                      | Eth port: 1kV differential mode (criterion B)                             |





| Operating Humidity    | 5% ~ 90%                  |
|-----------------------|---------------------------|
| Weight                | 473g                      |
| Dimension             | 185mm*70.8mm*37mm (L*W*H) |
| Operating Temperature | -20 ~ 60 °C               |

# Dimensions

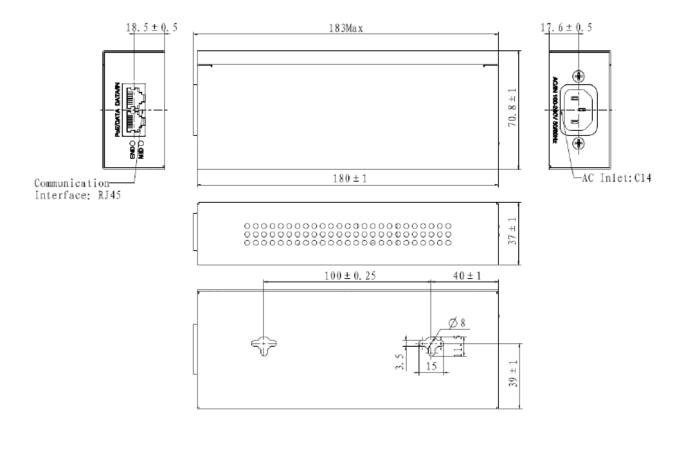

### Distributed by

#### Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision Poland T +48-22-460-01-50 poland@hikvision.com Hikvision USA T +1-909-895-0400 sales.usa@hikvision.com

Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision UK T +44-1628-9021-4 support.uk@hikvision.com Hikvision Europe T +31-23-5542770 saleseuro@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com Hikvision Middle East T +971-4-8816086 salesme@hikvision.com

Hikvision France T +33(0)1-85-330-444 info.fr@hikvision.com

Hikvision Oceania T +61-2-8599-4233 salesau@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Hong Kong T +852-2151-1761

© Hikvision Digital Technology Co., Ltd. 2015 | Data subject to change without notice |