

DS-UC8 4K Web Camera



- High quality imaging with 3840 × 2160 resolution
- Low distortion lens for reducing image distortion
- Built-in dual-microphone with clear sound
- USB Type-C interface, supporting USB 3.0 protocols
- Plug-and-play, no need to install driver software
- Support auto focus



▪ Specification





Camera	
Image Sensor	8 MP CMOS
Signal System	PAL/NTSC
Frame Rate	MJPG: 3840 × 2160 @ 30 fps/25 fps 2560 × 1440 @ 30 fps/25 fps 1920 × 1080 @ 30 fps/25 fps 1280 × 960 @ 30 fps/25 fps 1280 × 720 @ 30 fps/25 fps 640 × 480 @ 30 fps/25 fps 640 × 360 @ 30 fps/25 fps YUV: 1920 × 1080 @ 30 fps/25 fps 1280 × 960 @ 30 fps/25 fps 1280 × 720 @ 30 fps/25 fps 640 × 480 @ 30 fps/25 fps 640 × 360 @ 30 fps/25 fps NV12 : 1920 × 1080 @ 5 fps 1280 × 960 @ 10 fps 1280 × 720 @ 15 fps 640 × 480 @ 30 fps
Resolution	3840 (H) × 2160 (V)
Min. Illumination	0.1 Lux @ (F1.2, AGC ON)
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Lens	3.6 mm fixed focal lens
Field of View	horizontal FOV: 83°, vertical FOV: 53°, diagonal FOV: 91°
Lens Mount	M8
Day & Night	24/7 Color Imaging
Angle Adjustment	pan: 0° to 360°; tilt: 0° to 90°; rotation: 0° <i>*It is recommended to use a self-prepared tripod when the tilt angle is larger than 35°.</i>
Cable Length	2 m
Depth of Field	0.1 m to ∞
Image	
Wide Dynamic Range (WDR)	Digital WDR
Image Enhancement	Distortion Correction
White Balance	Auto
Audio	
Audio Sampling Rate	16 kHz
Interface	
Video Output	USB 3.0

Operating System	Windows 8.1+ Android 8.1+ Linux 4.14+ macOS 10.12+ Chrome OS
Built-in Microphone	2 built-in microphones, picking up sounds in the radius up to 5 meters
Indicator	White: Normally Working
General	
Operating Conditions	-10°C to 45°C (-40°F to 113°F), Humidity: 90% or less (non-condensing)
Power Supply	DC 5V ± 5% (USB)
Consumption	4.5 W MAX
Dimension	120 mm × 27.9 mm × 25.6 mm (4.72" × 1.10" × 1.01")
Weight	Approx. 150 g (0.33 lb.)
Accessory	
Packing List	Camera × 1 USB Cable × 1 Quick Start Guide × 1

▪ Available Model

DS-UC8

▪ Dimension

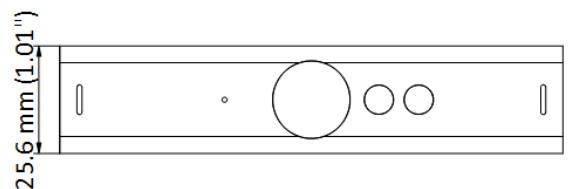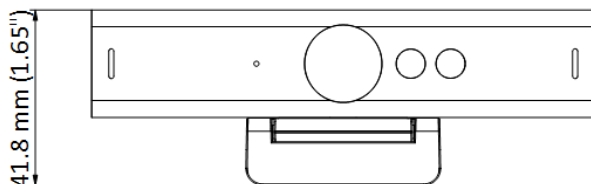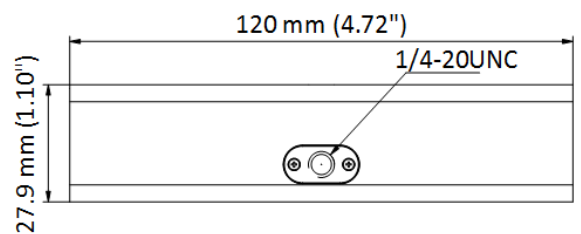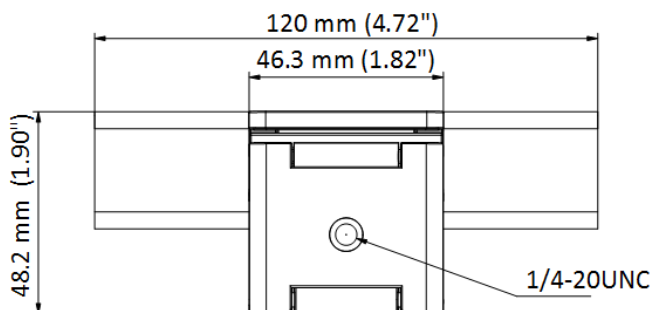

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 [216]521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com