

EST-PS48800

Power Supply Unit

Overview

EST-PSM48 Power Supply Manager is designed for distribution of DC Power Supply from Power Supply Units (PSU) and a back-up battery. The unit controls battery charging and distributes power supply to all Voice Evacuation System (VES) equipment at max 60 A. When the system uses battery back-up, the power supplied is 3.2 kW (48 V).

The unit complies with the EN 54-4 VES standards and also EN 12101-10 Smoke and Heat Control System standards.


As a main source of energy distribution, the manager uses external modules 800 W (EST-PS48800) for 48 V.

As a source of stand-by power supply it uses the battery bank of the capacity of up to 200 Ah.

EST-PSM48 cooperates with the 4 x 12 V VRLA battery bank. It maintains the bank in charged condition, ensures temperature compensation of charging parameters and monitors serial resistance of the battery and its wiring as specified in Exhibit No. A2 to the EN 54-4 Standard.

EST-PSM48 co-operates with up to 4 modules of EST-PS4880 Power Supply Units. The manager ensures safe connection for the purpose of parallel operations and monitors the output parameters of each power supply unit.

EST-PS48800 is designed for assembling in a dedicated EST-PF4 Power Supply Unit Frame. The elements of the system are designed for assembling in a Rack 19" IP30-type.

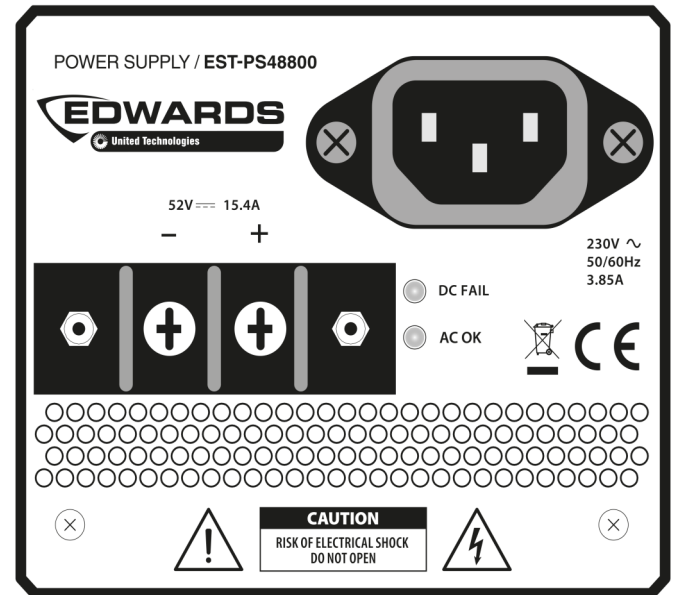

EST-PS48800

Power Supply Unit

Technical specifications

Eléctrico

Consumo de corriente	885 W max. (3.85 A)
----------------------	---------------------

Físico

Dimensiones físicas	85 x 95 x 395 mm (W x H x D)
---------------------	------------------------------

Peso neto	2.6 kg
-----------	--------

Regulatory

Certificación	EN54-4
---------------	--------

Normativas	EN12101-10
------------	------------

Electrical

AC power supply	230 VAC +10% -15%, 50/60Hz, 3.85 A Wire with IEC 60320 C13 3x0,75 mm2 coupling (supplied with the unit)
-----------------	---

Efficiency at rated power >	90%
-----------------------------	-----

AC input protection	T6.3 A/250 V 5x 20 mm slow-blow fuse (accessed when the casing is open)
---------------------	--

Protection from electric shock	Class I (EN 60065)
--------------------------------	--------------------

DC output	52 VDC; max. 15.4 A
-----------	---------------------



Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 14 September 2021 - 11:16