

AE-VC263T-ITS

Front and Rear Dual Way Camera




- Progressive scan CMOS
- Up to 1080P resolution
- Low illumination, 0.1 lux @ (F1.2, AGC ON), 0 lux with IR
- Day & night switch supports auto electronic (inside view) and fix on color (outside view)
- Supports auto white balance



▪ Specification

Selection Parameter	
Min. Illumination	Front: 0.01 Lux@(F1.2, AGC ON) Fear: 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
Protection Level	NA
Case Type	Dual Channel
Resolution	1920×1080
Lens Type	Fixed focal lens, 2.1 mm
FOV	2.1 mm Front (Horizontal: 126°, Vertical: 82°, Diagonal: 148°) Rear (Horizontal: 120°, Vertical: 66°, Diagonal: 147°)
Sensor	Progressive Scan CMOS
IR Distance	5 m
Camera	
Shutter Speed	1/25 s to 1/30,000 s
P/N	P (Default format is PAL and support switching to NTSC)
Wide Dynamic Range	NA
Day & Night	Inside vehicle view: Electronic Day to Night Outside vehicle view: Fix on Color
Lens	
Lens Mount	M12
Video	
Frame Rate	1080P@25 fps
Image	
SNR	42 dB
Interface	
Video Output	TVI
Built-in Microphone	Yes
Built-in Speaker	No
Audio	Yes
Interface Style	1 Vpp Composite Output (aviation plug or BM4F plug) Aviation plug: 1: video, 2: Audio, 3: power, 4: ground
Supplement Light Unit	
Power Supply	9 to 16 V DC
Power Consumption	Front: 1.5W MAX Rear: 2 W MAX
Weight	Approx. 230g
General	
Camera Material	Plastic
Camera Dimension	171 mm × 77.29 mm × 68.07 mm
Startup and Operating Conditions	-40 °C to 75 °C (-40 °F to 167 °F), 90%

Dimension

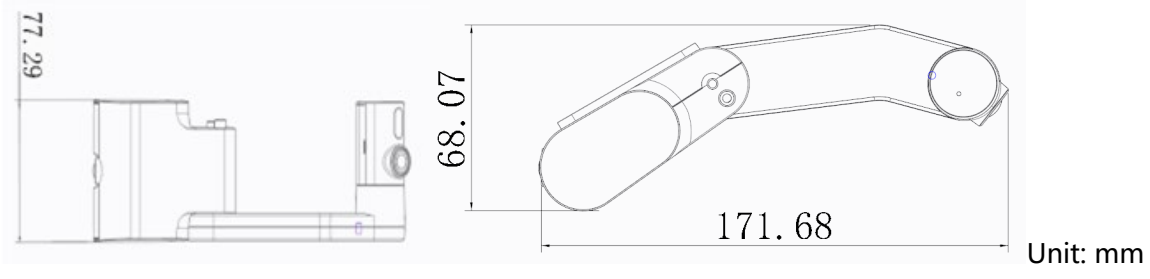

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

