

DS-K5671-ZV Face Recognition Terminal



The face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster and more accurate. It also supports multiple authentication modes: 1:N face match, etc. When installed on the turnstile, it can be applied in multiple scenarios, such as buildings, businesses, financial industries, and other important areas.

- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- Face recognition terminal for turnstile
- Built-in IO output or Wiegand output to communicate with the third-party turnstile
- 7 inch LCD Touch Screen, 2 M camera
- Max. 50,000 faces, and Max. 100,000 events
- Face recognition distance: 0.3 m to 3 m; Face recognition duration < 0.2 s/User; Accuracy rate \ge 99%
- TCP/IP, Wi-Fi communication
- Remote live view via RTSP protocol
- IP65





Specification


Specification					
Display					
Dimensions	7-inch				
Operation method	Capacitive touch screen				
Video					
Pixel	2 MP				
Lens	2				
Network					
Communication protocol	TCP/IP; SIP; RTSP; HikCentral Pro OpenAPI; Hik-ProConnect OpenAPI				
Wired network	10 M/100 M/1000 M self-adaptive				
Wi-Fi	Support				
Interface					
Network interface	1				
Lock output	1				
Door contact input	1				
Capacity					
Face capacity	50,000				
Event capacity	100,000				
Authentication					
Face recognition duration	< 0.2 s per person				
Face recognition accuracy rate	≥ 99%				
Face recognition accuracy rate	0.3 to 3 m				
Function					
QR code recognition	Support. The dimension of the recognized QR code picture should be larger than 6 cm × 6 cm.				
Audio prompt	Support				
Time synchronization	Support				
General					
Power supply	12 VDC/ 2 A				
Working temperature -30 °C to 60 °C (-22 °F to 140 °F)					
Working humidity	10 to 90% (No condensing)				
Protective level	IP65				
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)				
Platform Hik-ProConnect and HikCentral Professional					

- Available Model

DS-K5671-ZV

Dimension



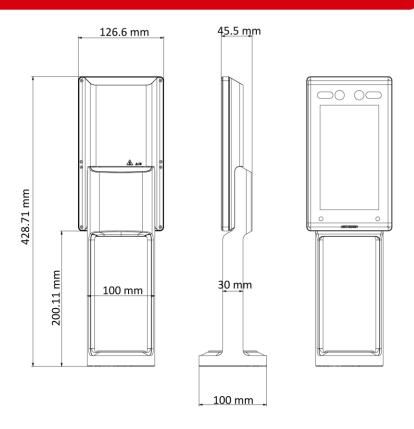

Accessory

Optional

Ш				
	DS-KAB5671-S Protective Shield	DS-K3B601 Pro Series Swing Barrier	DS-K3B801 Pro Series Swing Barrier	DS-K3B601A Pro Series Swing Barrier Plus
	DS-KAB5671-S Protective Shield	DS-K3B801#CD	DS-K3B801A Pro Series Swing Barrier	



Distributed by

HIKVISION[®]

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400

T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T +61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T+662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-{0}31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T+62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com