

## DS-1H18S/E(B) HD Video Balun

The DS-1H18S/E(B) video balun is a passive device that allows the transmission of real-time CCTV HD video signal and power via cost-effective Unshielded Twisted Paired (UTP) cable



### Features and Functions

- Real-time transmission over UTP cat5e/6
- Compatible with all HD-TVI/CVI/AHD/CVBS analog camera
- Low crosstalk and noise suppressions
- Male BNC connector
- Built-in solid state TVS (Transient Voltage Suppressor) for surge protection
- Wave Filter Design, Anti-Static Design
- Power and video signals transmit over one twist pair cable
- 60 dB crosstalk and noise immunity
- Exceptional interference rejection
- ABS engineering plastic housing
- Compatible with HD-TVI, HD-CVI, AHD and CVBS




## Specifications

Model		DS-1H18S/E(B)
	<b>Transmission Signal</b>	1 channel
	<b>Category Type</b>	UTP CAT 5E/ 6 (R<100Ω/100M)
	<b>Coaxial Video Connector</b>	BNC-M
	<b>Twisted-pair Video Connector</b>	Tool-less push-pin terminal block
	<b>Compatible Format</b>	HD-TVI/CVI/AHD/CVBS
	<b>Resolution</b>	720P/960P/1080P/3MP/4MP/5MP/8MP
	<b>Ant-interference</b>	>60db
		1a contact discharge electricity level3
		1b air discharge electricity level3
		Per: IEC61000-4-2
	<b>Coaxial Cable Connector</b>	2KV (common-code) Per: IEC61000-4-5
	<b>BNC Male</b>	75 ohms
	<b>UTP Cable</b>	100 ohms
	<b>Shell</b>	ABS engineering plastic
	<b>Color</b>	Black
	<b>Dimensions</b>	38.4*18.6*19.5mm (BNC connector & cable excluded)

	<b>( L x W x H )</b>	
	<b>Weight</b>	22g
<b>Stability</b>	<b>MTBF</b>	>10000 h
	<b>Operating Temperature</b>	-20° ~55° C
	<b>Storage Temperature</b>	-40° ~ 150° C
	<b>Humidity</b>	0-95% (non-condensing)

Camera Type	HD-TVI	HD-CVI	HD-AHD
720P camera	400m(1312ft)	450m(1476ft)	450m(1476ft)
960P camera	/	/	320m(1049ft)
1080P camera	250m(820ft)	250m(820ft)	250m(820ft)
3MP camera	250m(820ft)	/	250m(820ft)
4MP camera	180m(656ft)	200m(656ft)	200m(656ft)
5MP camera	180m(656ft)	/	180m(590ft)
CVBS camera	400m(1312ft)		

## Typical Application

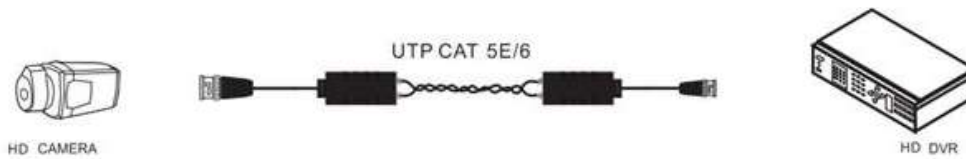

## Available Model

### DS-1H18S/E(B)

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Africa**  
T +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com