

CAMERA

TD-7554AS2

5MP HD Full-Color Turret Camera



- 5MP @20fps/4MP real-time image, high resolution, true color
- AHD / TVI / CVI lossless high-definition video output
- Up to 1500 TVL resolution
- CMOS progressive scan, perfectly capturing the moving object
- Support OSD menu
- Support DWDR
- High speed, long distance and real time transmission
- The LED can be automatically turned on at low illumination
- 20 ~ 30m LED view distance
- Support COC
- IP67



en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong
Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>


Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn

SPECIFICATIONS

Model	TD-7554AS2
Specifications	
Camera	
Image Sensor	1 / 2.5 "CMOS
Resolution	5MP
Image Size	2560 x 1936
Video Output	AHD / TVI / CVI
Image System	PAL / NTSC
Electronic Shutter	Auto; 1/50s~1/100000s(P); 1/60s~1/100000s(N)
LED View Distance	20 ~ 30 m
Frame Rate	5MP@20fps /4MP@30fps
Min. Illumination	0 lux with LED ON
Lens	3.6 mm
Lens Mount	M12
S / N Ratio	≥52dB (AGC OFF)
Protection Grade	IP 67
Functions	
Function Control	OSD (COC Control)
Smart LED	Yes
Digital WDR	Yes
Digital NR	Yes, 2D DNR
Global Exposure	Yes
Central Exposure	Yes
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Front Light Compensation	No
Contrast	Yes
Sharpness	Yes
Image Setting	Yes
Defect Correction	Auto
Language	Chinese/English
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~75°; Rotation: 0°~360°
Others	
Power Supply	DC12V (± 10%)
Power Consumption	LED OFF : < 1.5 W; LED ON : < 3W
Working Environment	- 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	Φ 94.6 x 82.8
Weight (net)	Approx. 0.39KG

DIMENSIONS

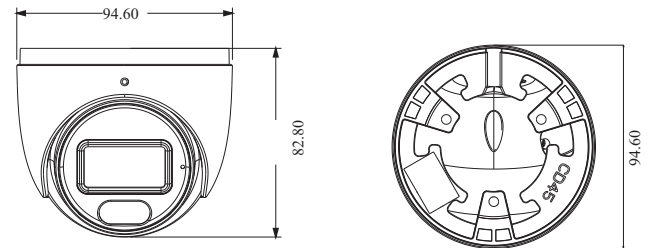

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-7554AS2(WR2)
-----------------	-----------------