

CAMERA

TD-7554AS2S

5MP HD Analog IR Turret Camera



- 5MP @20fps/4MP real-time image, high resolution, true color
- AHD / TVI / CVI lossless high-definition video output
- Up to 1500 TVL resolution
- CMOS progressive scan, perfectly capturing the moving object
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- 10 ~ 20m IR night view distance
- Support COC
- Support coaxial audio transmission
- IP67



en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>


Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn

SPECIFICATIONS

Model	TD-7554AS2S
Specifications	
Camera	
Image Sensor	1 / 2.5 "CMOS
Resolution	5MP
Image Size	2560 x 1936
Video Output	AHD / TVI / CVI
Audio	1CH built-in MIC
Image System	PAL / NTSC
Electronic Shutter	Auto
IR Distance	10 ~20 m
Frame Rate	5MP@20fps /4MP@30fps
Min. Illumination	0 lux with IR
Lens	3.6 mm
Lens Mount	M12
S / N Ratio	≥52dB (AGC OFF)
Protection Grade	IP 67
Functions	
Function Control	OSD (COC Control)
Day & Night	ICR
Digital WDR	Yes
Digital NR	Yes, 2D DNR
Global Exposure	Yes
Central Exposure	Yes
AGC	No
Auto White Balance	Yes
BLC	Yes
Front Light Compensation	No
Contrast	Yes
Sharpness	Yes
Smart IR	No
Image Setting	Yes
Defect Correction	Auto
Language	Chinese/English
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~75°; Rotation: 0°~360°
Others	
Power Supply	DC12V (± 15%)
Power Consumption	IR OFF : < 1W; IR ON : < 3W
Working Environment	- 10 °C ~ 40 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	Φ 94.8 x 82.8
Weight (net)	Approx. 0.2KG

DIMENSIONS

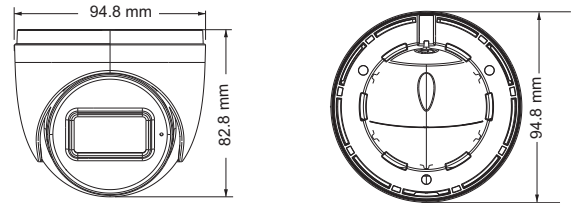

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-7554AS2S(D/AU/AR1)
-----------------	-----------------------