

DC121

Contacto magnético para empotrar. Apertura operativa máx. 12mm. 2m de cable.

Press-Fit Contact

The DC121 press fit switch is an 11 mm diameter magnetic contact with wire leads. Use no glue or screws to mount; small ribs on the housing hold the contact in place. Heavy-duty housing resist crushing from swelling wood. An extra wide gap version, DC127, is available for applications that may be prone to false alarms caused by loose fitting doors. The DC222 is a variant with a change-over contact type.

Applications

For recessed applications, either indoor or outdoor. Also useful in protecting china cabinets or closets, double-hung windows and aluminium windows.



Details

- 11 mm press-fit mounting; no screws or glue needed
- Attractive, added security of recessed installation
- Heavy-duty housing resists crushing
- Available in different cable lengths
- Tamper loop provided

DC121

Contacto magnético para empotrar. Apertura operativa máx. 12mm. 2m de cable.

Technical specifications

General


Tipo de Aplicación	Montaje empotrado
Tipo de contacto	NC
Conectividad	4 wires, 2 m

Wired/wireless

Wired-wireless	Cableado
----------------	----------

Physical

Physical dimensions	11 x 33 mm (Ø x L)
Color	Blanco
Brecha de funcionamiento	12 mm max.

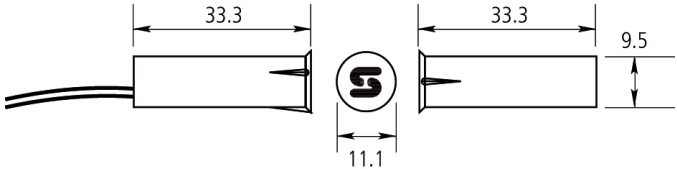

Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.