




# 8 Channel PoE+ Network Video Recorder

MODEL: VIGI NVR1008H-8P

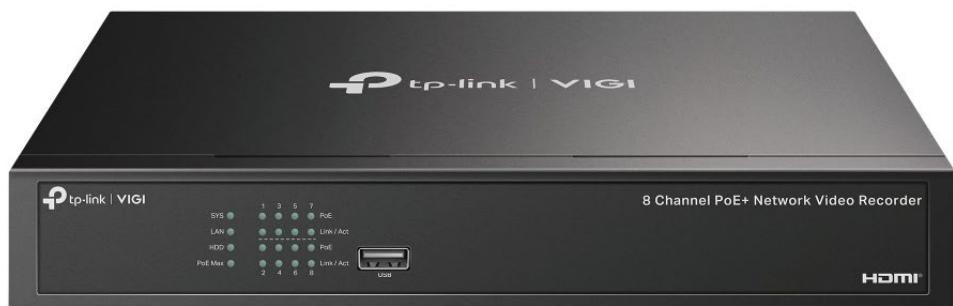

## H.265+

8 PoE+ Ports | 53W PoE Budget



Remote Management  
Dedicated VIGI app



### Smart Detection

Configuration for Better  
Monitoring\*



### Two-Way Audio

Listen and Talk in Real Time



### Quick Playback

Support for 8-Channel Synchronous  
Playback



### Onvif

Promises Comprehensive  
Compatibility

## Overview

### VIGI Surveillance Solution

The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever. Our outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

## Highlight



### 8-Channel Live View

Ensure a real-time display of every monitored area on one screen and take everything under your control.



### Simplified Deployment with PoE+

Easily connect and power your PoE camera with one RJ45 cable transmitting both data and power. No power adapter needed.



### 4K Video Output

Show more details with up to 8MP resolution for one channel and 16MP decoding capacity in total for all channels



### Easy Management

Seamlessly manage the NVR and connected cameras via the web UI, NVR UI, VIGI app, and VIGI Security Manager. Customize the management systems to suit your specific needs.



### Practical Playback


Find the target footage easily by date, event types, and tags. Replay with variable playback speeds to quickly review footage.



### Mass Storage

Stores up to 16 TB of footage from connected cameras to secure your data for quick, convenient access.

# Network Topology

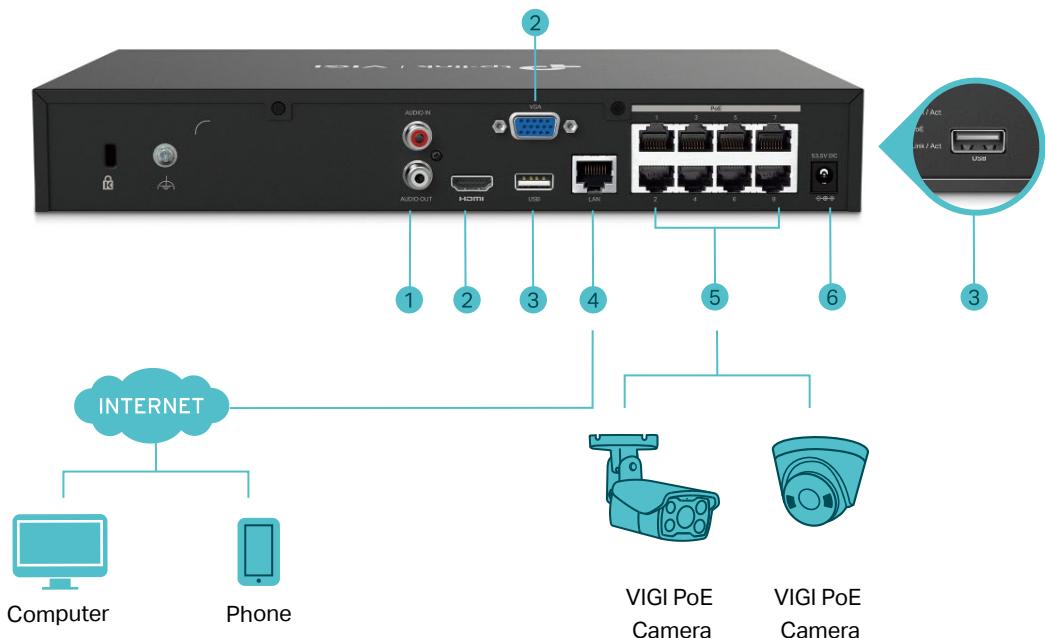

1. AUDIO IN and AUDIO OUT for Two-Way Audio
2. HDMI and VGA Ports for Video Output
3. Two USB Ports for Mouse, Keyboard, or Mobile Hard Disk Connection\*
4. LAN Port for Ethernet Connection
5. Eight PoE+ Ports to Connect and Power Your Camera
6. Power Supply

Specifications are subject to change without notice. ©2024 TP-Link

\*HDD is not included.

Some features may operate sub-optimally due to compatibility issues. For best performance, we recommend using VIGI NVR with VIGI cameras.

<sup>†</sup>A hard disk drive (not included) must be installed for operation.

# Specifications


NVR	
Product Model	VIGI NVR1008H-8P
Video and Audio	
IP Video Input	8-Channel
Incoming Bandwidth	80 Mbps
Outgoing Bandwidth	60 Mbps
HDMI Output Resolution	1 Channel, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz
VGA Output Resolution	1 Channel, Resolution: 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz
Video Output Mode	HDMI/VGA Simultaneous Output
Multi-View Display	1/4/6/8
Decoding	
Audio Compression	G.711A/G.711U/G.726
Video Compression	H.265+/H.265/ H.264+/H.264
Record Resolution	8MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	8-Channel
Capability	25fps: 2-ch @ 8MP, 4-ch @ 4MP, 8-ch @ 2MP 30fps: 4-ch @ 3MP, 2-ch @ 5MP
Record Management	
Record Mode	Manual Recording, Scheduling Recording, Motion Detection Recording
Playback Mode	Instant Playback, Regular Playback, Tag Playback, Event Playback
Backup Mode	Regular Backup, Video Clip Backup
Playback Function	Play, Pause, Stop, Fast Forward, Fast Backward, Play By Frame, Full Screen, Video Clip, Export Clip, Digital Zoom, Lock Recording, Audio On/Off
Network	
Network Protocols	UPnP (Plug and Play), NTP (Network Timing)
Interoperability	ONVIF Profile S/T, CGI
Mobile Phone Access	Android, iOS
Browser	Chrome (57+), Firefox (52+), Edge (91+)

PoE	
Interface	1- 8, RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface
Power	53 W Available for All PoE+ Ports, 30 W Max per Port
Standard	802.3at/af Compliant
Auxiliary Interface	
Network Interface	1 RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface
USB Interface	2× USB 2.0
Audio Interface	1-ch RCA Input; 1-ch RCA Output
Alarm In/Out	N/A
Serial Interface	N/A
Power	1× DC Jack
Reset Button	1
Speaker	N/A
eSATA	N/A
HDMI	1
VGA	1
Hard Disk	
SATA	1 SATA Interface
Capacity	Up to 16 TB Capacity for Each HDD
Alarm	
General Alarm	<ul style="list-style-type: none"> <li>• Motion Detection</li> <li>• Video Tampering</li> <li>• Scene Change Detection</li> <li>• Line-Crossing Detection</li> <li>• Intrusion Detection</li> <li>• Region Entering Detection</li> <li>• Region Exiting Detection</li> <li>• Loitering Detection</li> <li>• Object Abandoned/Removal Detection</li> <li>• Vehicle Detection</li> <li>• Human Detection</li> <li>• Abnormal Sound Detection</li> <li>• Smart Frame</li> </ul> <p>Note: The alarm function requires the use of a camera.</p>
Anomaly Alarm	<ul style="list-style-type: none"> <li>• Video Loss</li> <li>• Offline and IP Conflict</li> <li>• Disk Exception</li> <li>• Login Exception</li> </ul> <p>Note: The alarm function requires the use of a camera.</p>
Alarm Linkage	<ul style="list-style-type: none"> <li>• Recording</li> <li>• White Light Alarm</li> <li>• Buzzer</li> <li>• Log</li> <li>• Audible Alarm</li> </ul> <p>Note: The alarm function requires the use of a camera.</p>

## General

Package Contents	<ul style="list-style-type: none"><li>• VIGI Network Video Recorder</li><li>• Power Adapter</li><li>• HDD Screws</li><li>• Mouse</li><li>• Mounting Brackets &amp; Rubber Feet</li><li>• Quick Installation Guide</li></ul>
Power Supply	53.5V DC/1.31A
Max. Power Consumption	2.38 W (without disk) 12.94 W (with disk)
Working Temperature	NVR: -10 °C to 55 °C Power Adapter: 0 °C to 40 °C
Storage Temperature	-40 °C to 70 °C
Working Humidity	10%~90% RH Non-Condensing
Storage Humidity	10%~90% RH Non-Condensing
Product Dimensions (W × D × H)	294 × 180 × 44 mm
Net Weight	1.12 Kg
Gross Weight	2.06 Kg
Certification	CE, EAC, UKCA, RCM, Triman, BSMI, VCCI, FCC, IC, HDMI

## Dimensions

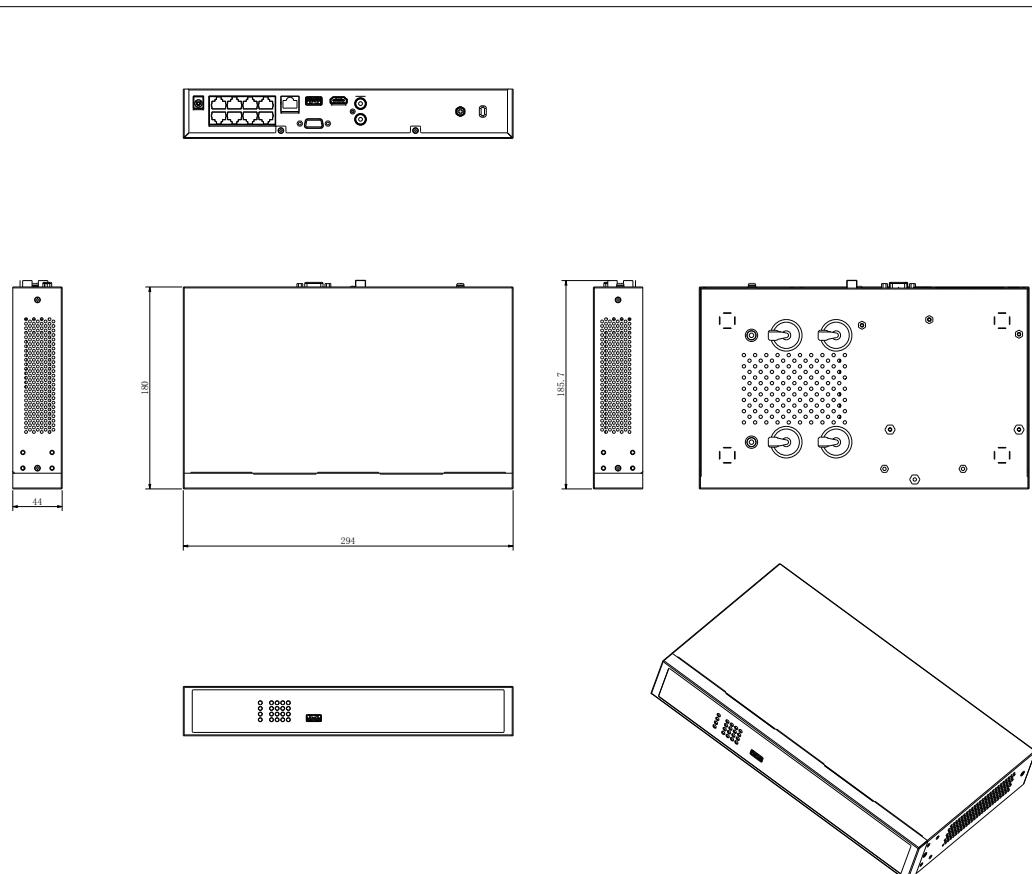

\*PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.

\*The number of simultaneously playable channels may be fewer than eight, or none, if the total resolution exceeds 16MP.